

Standalone Multi Switches



Model: SH-535


Part #: Resch

Specification

Type: HCS 508
 Input: 4x 950-2200 MHz
 Output: 8x 47-2200MHz
 Switching Voltage:
 14V/18V +/- 1V.0 Hz/22kHz
 Tap: SAT -4.0dB +/- 2dB
 Tap terr. Active: 0.5dB +/- 3dB
 Tap terr. Passive: -14.5dB +/- 3dB
 Isolation Lines: >30 dB >30 dB
 Spoilation SAT/Terr.:
 >25 dB > 25 dB
 Return loss SAT. terr.:
 10dB > 10dB
 Return loss Line: 12 dB > 12dB
 Output Level: max. 95 dBμV

The stand alone multiswitches were developed especially for digital reception. They distinguish by high return loss and low bit error rate as soon as a high isolation of the lines.

Further characteristics: 5 / 9 inputs, 4 ... 16 outputs, terrestrial active and adjustable, new secondary, switching power supply, adjustable inputs

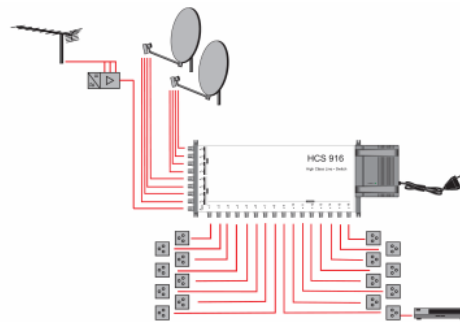

- Applications:**
- Satellite Distribution Control for Luxury Homes
 - Satellite Distribution Control in Luxury Offices
 - Hotel Satellite Distribution Control
 - Smart School Satellite Distribution Control Sharing