

RS-485 Proximity Readers (125KHz & 13.56MHz)



PXR-34ESK/MSK



PXR-52ES/K
PXR-52MS/K



PXR-62ES/MS




RCU-ESK/MSK

Features

- Weather proof and dust proof (except PXR-34 / RCU reader)
- Ideal solution for automatic fare collection, university card, park & ride, ticketing, prepaid metering applications.
- Sensors for real time alarms
- Configurable tones to signify various events.
- Alternative setting to access serial number or block data of Mifare card

Model No. Identification

PXR-52ESKL

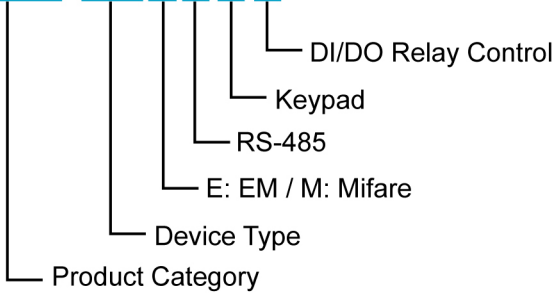

Ordering Information

PXR-34ES/MSK	-ES: EM / -MSK: Mifare format, with keypad and LCD Display
PXR-52ES/MS	-ES: EM / -MS : Mifare format
PXR-52ESK/MSK	-ESK: EM / -MSK : Mifare format with keypad
PXR-62ESK/MS	-ESK: EM format with keypad, -MS: Mifare format
RCU-E/MSK	-E: EM format / -MSK: Mifare format with keypad & LCD Display
Package Content: 1pc/inner box	■ Quick Start Guide ■ Accessory pack with screws and hex key wrench
Color	PXR-52XX Ivory Light Grey Dark Grey PXR-62XX Dark Grey DarkGrey & Silver

Product	Q'ty/Carton	NW(kg)	GW(kg)	Cu.Ft.
PXR-34	42	10.5	11.5	1.72
PXR-52	25	6.75	7.75	1.72
PXR-62	25	6.5	7.5	1.72
RCU	12	9.8	11.00	1.72

Specifications

PXR-	34ESK	52ES/K	62ES	RCU-ESK	34MSK	52MS/K	62MS	RCU-MSK
Format	EM	EM	EM	EM	Mifare	Mifare	Mifare	Mifare
Frequency	125KHz	125KHz	125KHz	125KHz	13.56KHz	13.56KHz	13.56KHz	13.56KHz
Baud Rate	19200bps	19200bps	19200bps	19200bps	19200bps	19200bps	19200bps	19200bps
Input ports	1	1	1	1	1	1	1	1
Alarm	YES	YES	YES	YES	YES	YES	YES	YES
Reading Range	10cm (max.)	15cm (max.)	15cm (max.)	10cm (max.)	5cm (max.)	5cm (max.)	5cm (max.)	5cm (max.)
Power/Status LED indication	YES	YES	YES	YES	YES	YES	YES	YES
LCD Display	YES	NO	NO	YES	YES	NO	NO	YES
Keypad	YES	NO / YES	NO	YES	YES	NO / YES	NO	YES
Operating Voltage	DC12V	DC12V	DC12V	DC12V	DC12V	DC12V	DC12V	DC12V
Power consumption	1.5W	1.5W	1.5W	1.5W	1.5W	1.5W	1.5W	1.5W
Dimension (mm)	140 x 65 x 25	120 x 76 x 23	120 x 74 x 27	209 x116x 37	140 x 65 x 25	120 x 76 x 23	120 x 74 x 27	209x116x37
	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)
Weight	130g	130g	130g	612g	130g	130g	130g	612g