


Time Attendance System - Fingerprint

This product has a unique functionality both for Time and Attendance and Access Control. Mobile Bio designed to verifies fingerprint of each employee and allow to access. It also provides Report Information and Alert Information.

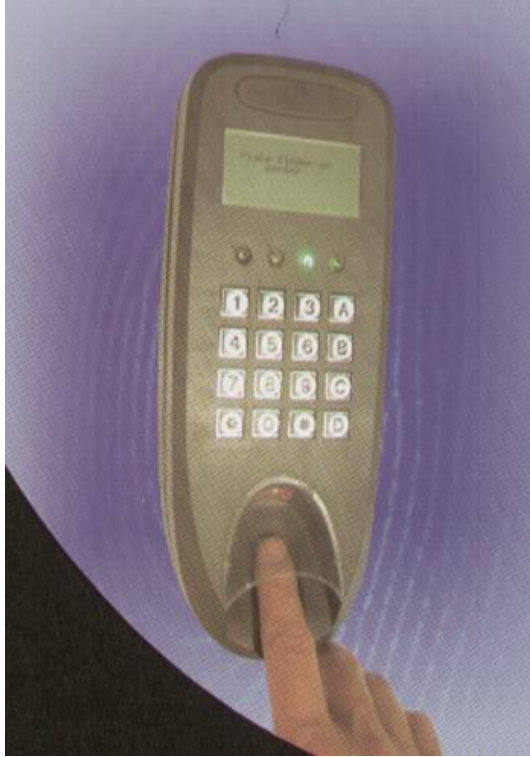

MobileBio is the latest innovation in Biometric Technology. Unlike conventional Biometric units, MobileBio makes use of GPRS (General Packet Radio Service) to transfer data to and from a centrally located server, creating a total wireless solution.

The unique design of the MobileBio system allows for the rapid recognition of fingerprints for both 'Time & Attendance' as well as 'Access Control', MobileBio does a 1 to 1 search and therefore maintains it's recognition speed of between 1 - 2.5 seconds irrespective of the database size.

MobileBio requires a fingerprint for positive recognition therefore getting rid of common problems like "Buddy Clocking" and "Ghost Employees".

- Applications:**
- Fast and Efficient Security Control in Smart Airports
 - Reliable Security Control in Luxury Enterprise
 - Guaranteed security in of national security issues

Model: SH-499

Part #: Sony - MobileBio

Features

- Utilizes GPRS - wireless
- Heat and pulse sensor
- Unlimited number of employees
- E-mail and SMS business rules/alerts
- Remote staff control; Set own security level; Remote enrolment
- Tamper proof time management
- The Sony FIU-300 Puppy fingerprint scanning and matching identity device
- Highly accurate matching with variable verification levels adjusted to customer needs
- Reliable capacitance sensing technology accepts most fingers
- Draws on Sony experience in imaging, security and OEM products

Specifications

Color Dark Grey
 Verification speed 2.5 seconds
 Matching 1:N
 Enrollment Unlimited
 Transactions Unlimited
 LCD Alphanumeric 24 x 8 graphic
 Keypad 16 keys Metal
 Access control 12V DC relay x 2
 Power 12V DC, universal AC adapter included
 Temperature range -10° C to 60° C
 Humidity Under 90%RH
 Sensing Inputs 2 (passive, door opened)

Dimensions

Size: 105W X 260HX 65D (mm)