


Digital Multiplexer – 8 Channel



Connection Diagram

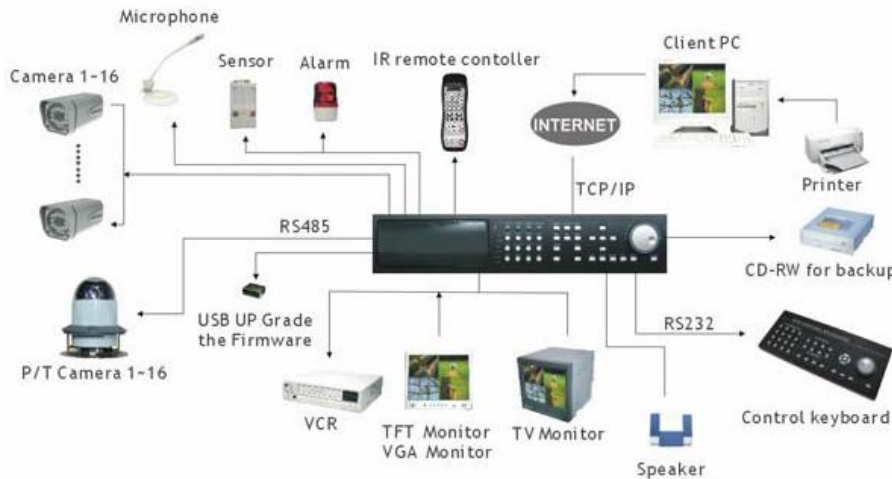

- Applications:**
- Camera Security for Luxury Homes
 - CCTV Security at Luxury Offices
 - Hotel Security and Surveillance
 - Smart School Supervision and Observation

Model: SH-563

Part #: Ntic J2000S08T2

Features

- JPEG 2000 Algorithm compression
- The best picture quality for playback
- 8 channel video 240(200)fps recording capability
- Triplex (Recording / Ethernet)
- Multi Language OSD
- Remote viewer for good picture quality through TCP/IP
- Jog-shuttle for convenience search
- VGA option available (Supporting TFT LCD Monitor)
- USB(Device) port for firmware upgrade
- Easy PTZ camera control by front panel buttons
- Remote Controller

Specifications

Compression: JPEG-2000 Algorithm
 Storage Capacity: Up to 2 HDDs with no limitation in capacity
 CD-RW: For Backup
 VGA: 1CH (Supporting TFT LCD Monitor/ Option)
 Video Input: 8CH
 Video Output: Monitor / VCR
 Split Screen: 1,4,6,8,9 split
 Compressed Rate (Image Size Fixed): 28/KB (720x240/NTSC, 720x288/PAL) each picture
 Recording Speed: PAL
 100fps(720x288), 200fps(360x288)
 Recording Resolution:
 Full (720x240 / 720x288),
 Dual(360x240/ 360x288),
 Motion Detect: Area division : 16x12
 Recording Mode: Time, Motion, Schedule, Alarm
 Search Mode: Percentage Search, Date/ Time Search, Event Search
 Password Protection: Admin, Manager, User1~8 Allowed to access the system
 IR Remote Controller: Built-in
 Backup: CD-RW back-up, Download via IP Network, VCR
 Firmware Upgrade: USB port for firmware upgrade
 Operation Temperature:
 41 ~ 104° Fahrenheit (5 ~ 40°)
 Operation Humidity: Less than 90%
 Power Supply: DC Adapter(12V DC 8.3A)

Dimensions

Size: 430W x 400D x 92H (mm)
 Weight: 7.5 kgs (w/o HDD)