

### Ramberg

#### For direct surface integration

Recessed cube-shaped paver with standard or high luminous intensity. Heat-treated glass body with frosted slip-proof finish.


Powered with high quality LED's (50.000 to 100.000 hours average lamp life), operating at 10V DC using specific LED power supply. Power consumption of approx. 0,5W (standard intensity) or 2W (high intensity).

Can be incorporated directly into the wall or floor for perfect aesthetical integration indoors or outdoors. IP65 or IP68 protection.

Available with white, blue, amber, green, red or yellow light.

Dimensions: 100 x 100 x 70mm


100mn






Full technical information available upon request.

## Ramberg

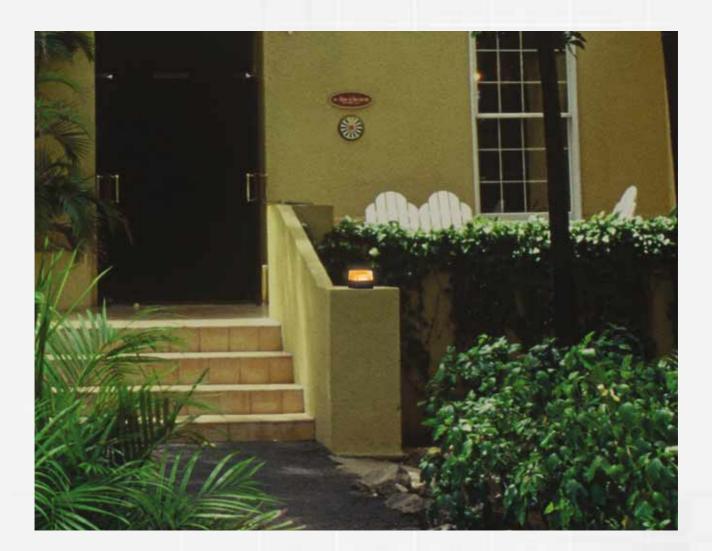

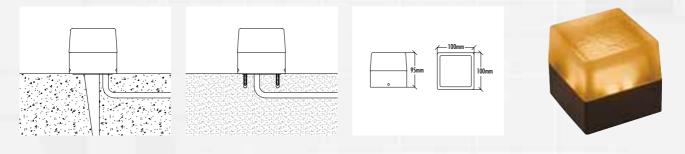


#### Surface-mounted

Surface-mounted cube-shaped fixture with standard or high luminous intensity. Heat-treated glass body with AISI 316 stainless steel base. Powered with high quality LED's (50.000 to 100.000 hours average lamp life), operating at 10V DC using specific LED power supply. Power consumption of approx. 0,5W (standard intensity) or 2W (high intensity). IP65 or IP68 protection. Available with white, blue, amber, green, red or yellow light.



# Ramberg



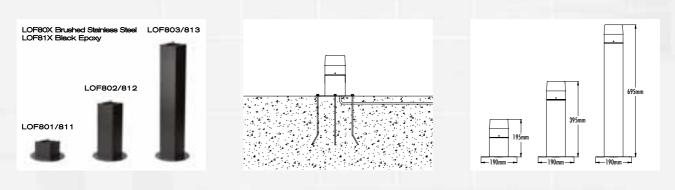

#### Bollards

Bollard mounted cube-shaped fixture with standard or high luminous intensity. Heat-treated glass body with AISI 316 stainless steel base. Powered with high quality LED's (50.000 to 100.000 hours average lamp life), operating at 10V DC using specific LED power supply. Power consumption of approx. 0,5W (standard intensity) or 2W (high intensity). IP65 or IP68 protection. Available with white, blue, amber, green, red or yellow light.



Full technical information available upon request.